




PB-9813D

INDIRECT SPEAKER SELECTOR

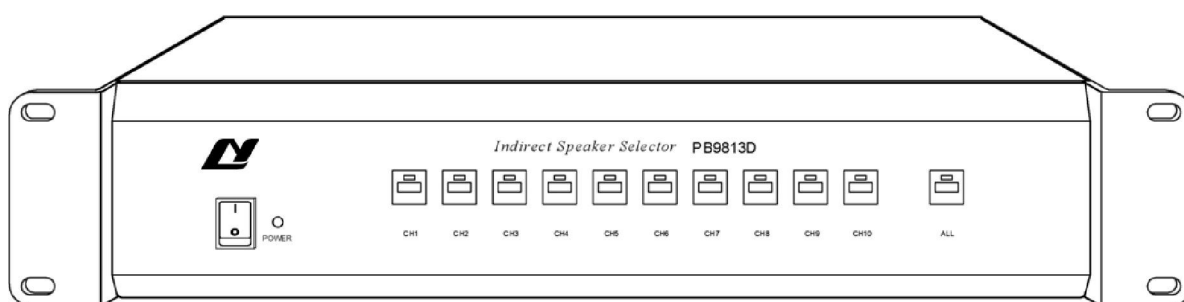


OWNER'S MANUAL

Before operating, please read this manual completely.

FEATURES


- 2CH inputs, 10CH outputs.
- Possess forced insert function.
- All call button.
- The channel will be switched to input B automatically while alarming.

FRONT PANEL

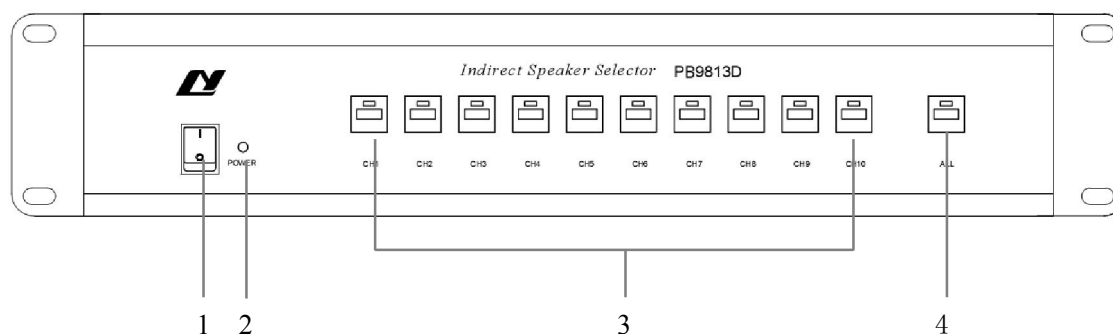


- 1 Power switch. (1 is power on and the “power LED” is on)
 2 Power indicator. 3 Distributor. 4 All call button.

REAR PANEL & CONNECTIONS

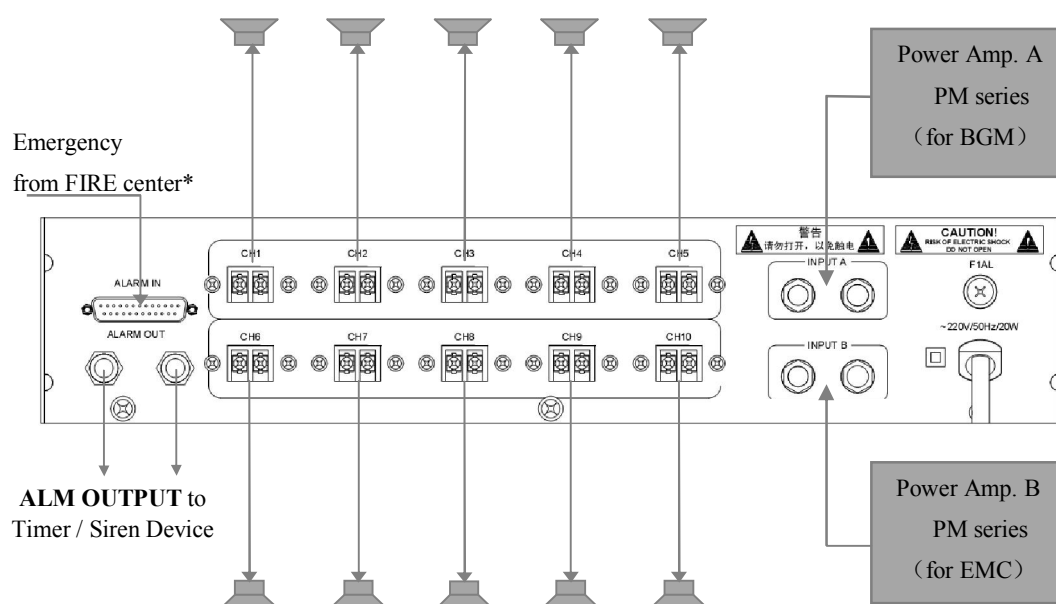

* **ALARM IN** to be connected to fire center

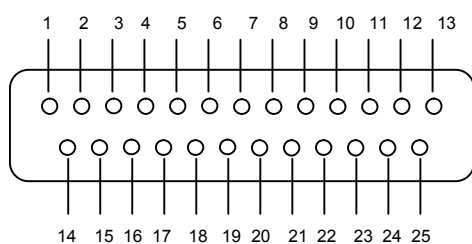

- **1-10** Live Terminals of CH1-CH10 respectively
- **14-25** COM

OPERATION

1. Make **BGM** signal input from **A** terminal while **EMC** signal input from **B** terminal on the rear panel.
We also can make **A, B** together with short circuit if there is none of **BGM** amplifier.
2. Press down any **Distributor key** to switch on channels which you want.
3. Click **All call button** with its LED lit and all **Switch indicators** lit. In this case, all **Switching keys** are no use. Click **All call button** again and its LED gone off, In this case, all **Switching keys** are use.
4. Pin 1-10 of “**ALARM IN**” port are **live** terminals of **CH1-CH10** respectively while pin 14-25 are **com**. Every channel will be switch to **B** while alarm signal (short circuit signal) is fed to **ALARM IN**.
5. An grounded **Alarm** signal will be send out from “**ALARM OUT**” while any alarm signal appears on “**ALARM IN**” .

SPECIFICATIONS

Channels	10, switch able
Input capacity	70-100V , 10A
Channel capacity	70-100V , 5A/CH
ALM	0/+24V, 0 (short circuit) is Valid
Protection	AC fuse
Power Requirement	AC 220-240V/50-60Hz
Outer Packing Size(mm)	(L×W×H) 530×440×195
Unit Size (mm)	(L×W×H) 484×365×88
Gross weight	8.3kg
Net weight	6.5kg

Specifications are subject to be changed without notice.

CAUTION

- When the “Power switcher” is off, please pull out the power cord from the socket.
Please keep the equipment out of water.
- To reduce the risk of electric shock, do not remove the cover.
- No user parts inside. Refer servicing to qualified service personnel.

LY International Electronics Co., Ltd.