



LY INTERNATIONAL ELECTRONICS

Outdoor Horn Speaker H-3307





OWNER'S MANUAL

Thank you for purchasing PA speaker system of **LY** series. All of **LY** series products have been tested strictly before shipping. In order to facilitate installing, modulating and running please read this manual carefully before setup.


SPECIFICATIONS

Loudspeaker Type:	2-way horn loaded coaxial, weather resistant
Input Voltage:	160V
Rated Input Power:	1000W
Frequency Response:	100Hz to 16kHz
Sensitivity (1W/1m):	110dB
Maximum Output:	140dB
Nominal Impedance:	25 ohms
Crossover Frequency:	1.0KHz
Beam width:	50° H×45° V (1kHz-16kHz, -10dB)
Dimensions-Height:	690mm
Width:	690mm
Depth:	900mm
Weight (with yoke):	73.8 kg


FREQUENCY RESPONSE & IMPEDANCE

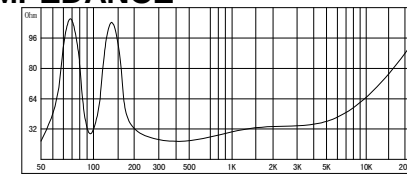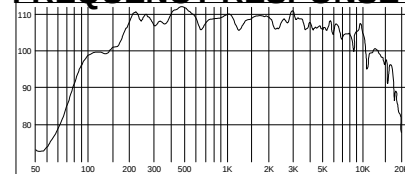


BEAMWIDTH

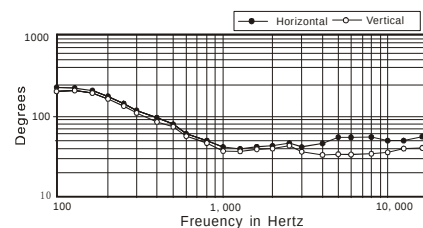

AXIAL Q

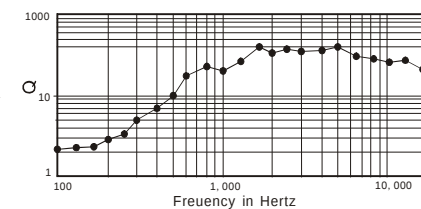

STRUCTURE

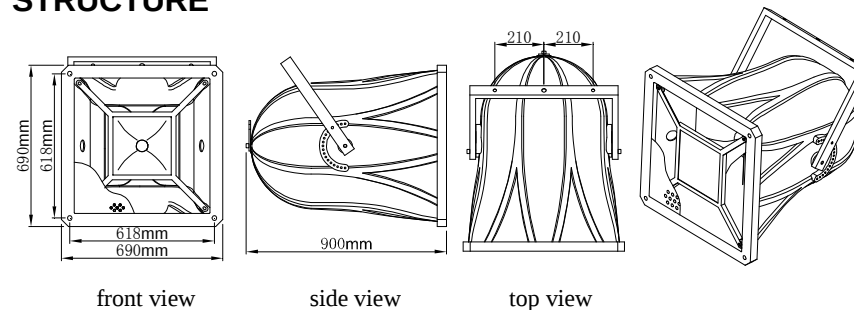

INSTALLATION

1. Install the bracket on the speaker system and adjust the angle, then fix up the screw;
2. Install screws on the place where you want to hung the speaker and connect them;
3. Connect public address wires to the speaker (the blue wire is "+");
4. Examine whether it is steady.

LY INTERNATIONAL ELECTRONICS CO., LTD.
[HTTP://WWW.LYINTLCORP.COM](http://www.lyintlcorp.com)