



PB-9815E

Emergency Panel




OWNER'S MANUAL

Before operating, please read this manual completely.

FEATURES


- Alarm triggering and siren or recorded signal output.
- 1 minutes digital REC / PLAY IC.
- Record Level control.

FRONT PANEL

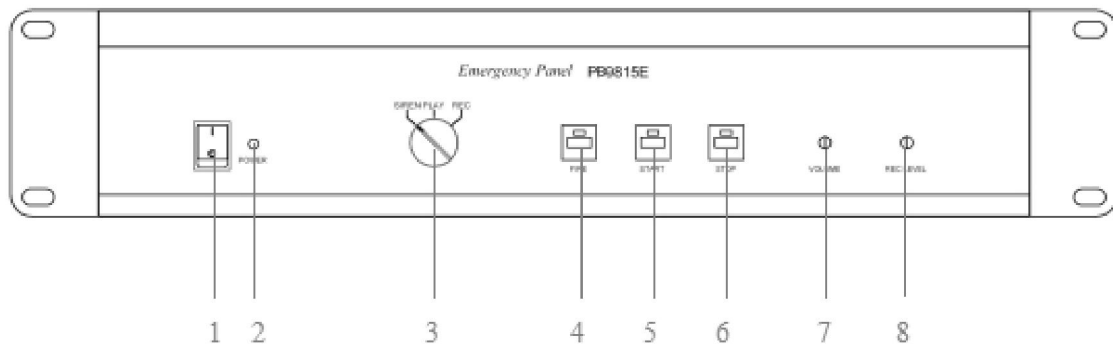

- | | |
|---------------------------------------|--|
| ① Power switch | ④ FIRE : manual siren. |
| ② Power indicator | ⑤ START : start recording or playing. |
| ③ OPTION | ⑥ STOP : stop recording or playing. |
| SIREN : siren signal output. | ⑦ Output level control. |
| PLAY : recorded signal output. | ⑧ REC level control. |
| REC : record into IC inside. | |

REAR PANEL & CONNECTIONS

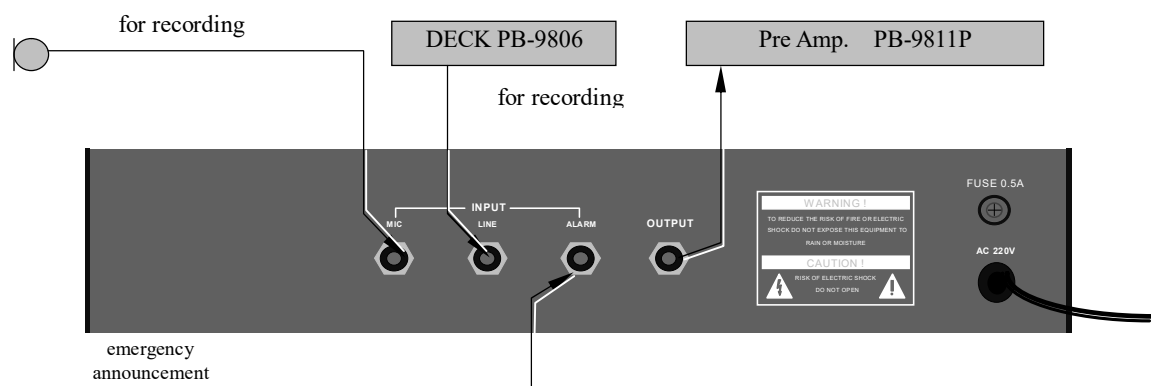

OPERATING

1、AUTO MODE

Plug in the mains regardless the position of “**POWER**” switch and adjust the knob “**VOLUME**” properly.

- **Alarm with siren** Put “**OPTION**” switch at “**SIREN**” position, as soon as an alarm signal comes into the “**ALARM**” port, siren will be sent out from “**OUTPUT**” port until alarm released.
- **Alarm with a message recorded** Put “**OPTION**” switch at “**PLAY**” position, as soon as an alarm signal comes into the “**ALARM**” port, message recorded in inner IC will be sent out from

“**OUTPUT**” port repeatedly until alarm released.

2、 Manual mode

Plug in the mains, turn on “**POWER**” switch and adjust knob “**VOLUME**” properly.

- **Alarm with siren** Put “**OPTION**” switch at “**SIREN**”, as soon as press down “**FIRE**” button siren will be sent out from “**OUTPUT**” port until the button released.
- **Alarm with a message recorded** Put “**OPTION**” switch at “**PLAY**” position, click “**START**” button once, message recorded in inner IC will be sent out from “**OUTPUT**” port until click “**STOP**” button or the message comes to the end. While the message sending out it also be broken off by click “**START**” button once again.

3、 Recording

Set “**OPTION**” switch at “**REC**” position and set “**REC LEVEL**” at middle position then turn the “**POWER**” switch on. Click “**START**” button, signals from “**LINE**” or “**MIC**” will be recorded into inner IC chip until press “**STOP**” button, and it also stop at 1 minutes later too.

SPECIFICATIONS

Inputs	Mic: 2 mV, 10 k Ω ; Line: 0 dBV, 10 k Ω ; Alarm: 0V / +24V(or open), 0 V (short circuit) is valid .
Output	SIREN or Recorded Message: 0 dBV
Rec.	IC inside, 60 s.
Frequency response	100 Hz---10 kHz
Protection	AC fuse \times 1
Power Requirement	AC 220 –240 V / 50~60 Hz
Dimensions	485 \times 88 \times 365 mm
Gross weight	6.5 kg
Net weight	5.2 kg

Specifications are subject to be changed without notice .

CAUTION

To reduce the risk of electric shock, do not remove the cover.
No user parts inside. Refer servicing to qualified service personnel.

LY INTERNATIONAL ELECTRONICS CO. LTD.