



PB9811P PRE AMPLIFIER




OWNER'S MANUAL

Before operating, please read this manual completely.

FEATURES


- 5 microphone inputs, 3 auxiliary inputs, 2 priority inputs, 2 outputs.
- Muting function.
- Individual volume control.
- Bass and Treble tone control.

FRONT PANEL

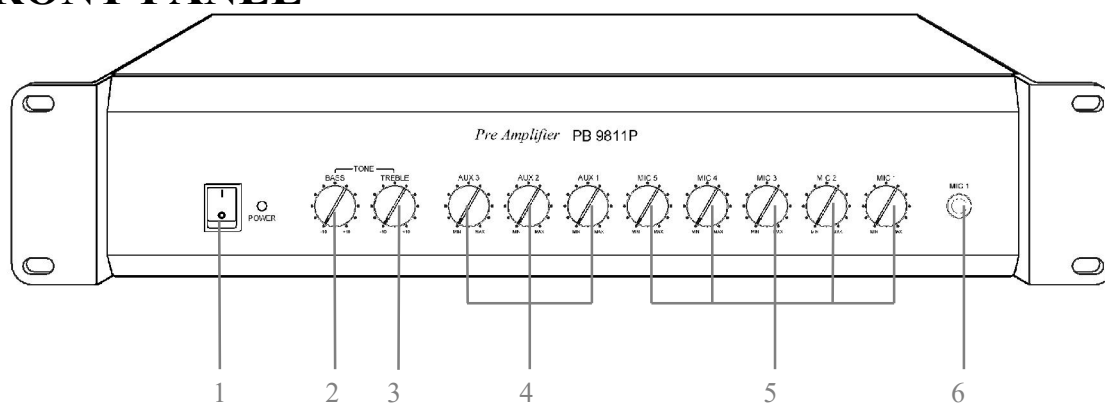

- | | |
|--------------------------|--|
| 1 Power switch. | 4 AUX 3, 2, 1 volume control. |
| 2 Bass control. | 5 MIC 5, 4, 3, 2, 1 volume control. |
| 3 Treble control. | 6 MIC 1 input. |

REAR PANEL

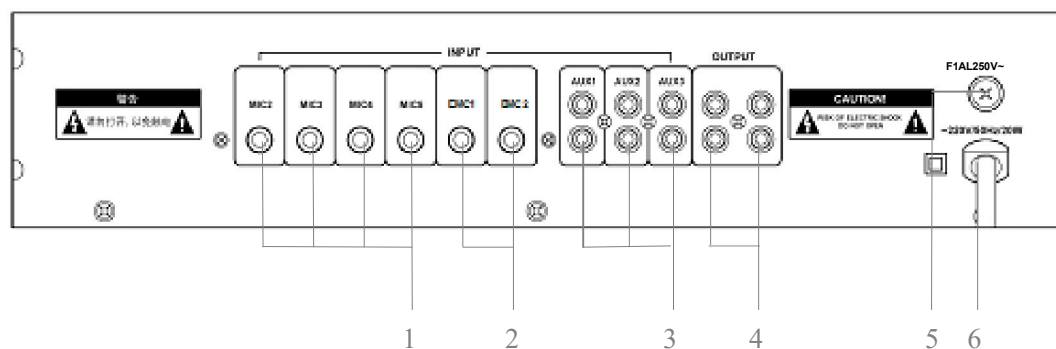


- | | |
|---------------------------------|-------------------------|
| 1 MIC 2, 3, 4, 5 inputs. | 4 OUTPUT jacks. |
| 2 EMC 1, 2 inputs. | 5 AC FUSE . |
| 3 AUX 1, 2, 3 inputs. | 6 AC power cord. |

MUTING FUNCTION

The **MIC** input 2, 3, 4, 5 and **AUX** input 1, 2, 3 automatically muted by **EMC** input 1, 2. (**EMC** 1 or 2 input overrides the **MIC**2, 3, 4, 5 and **AUX** 1, 2, 3 signals).

The **MIC** input 2, 3, 4, 5, **AUX** input 1, 2, 3 and **EMC** 1, 2 are automatically muted by **MIC**1 input (**MIC**1 input overrides the other input signals).

CONNECTIONS

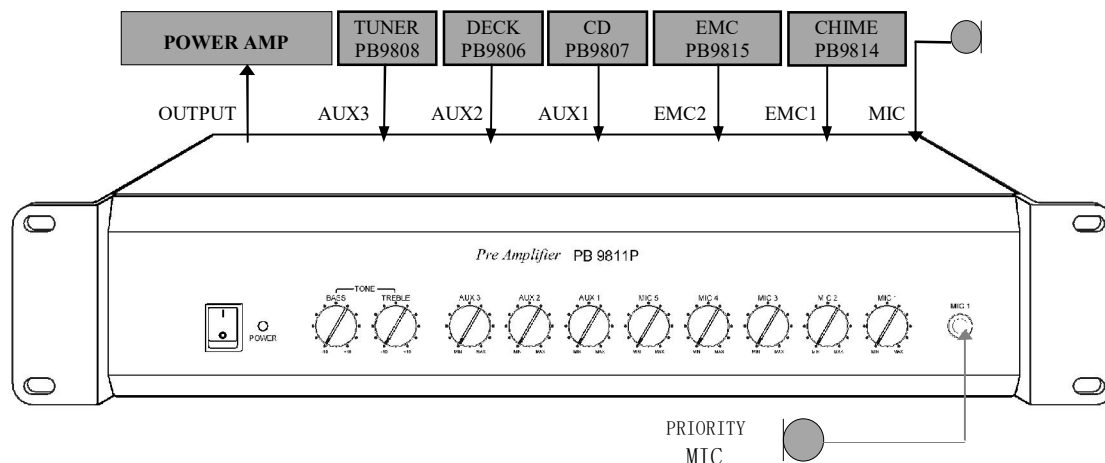

SPECIFICATIONS

Inputs	Mic1, 2, 3, 4, 5: 600Ω, 2.5mV, unbalanced Aux1, 2, 3 : 10kΩ, 250mV, unbalanced
Audio output	0dBV
Frequency response	Mic: 100Hz-15kHz (±3dB) ; Line: 20Hz-18kHz (±3dB)
Signal/ noise ratio	Mic input : 80dB Aux input : 90dB
Tone	Bass : ±10dB (100Hz) Treble : ±10dB (10kHz)
Protection	AC fuse
Power Requirement	AC 220-240V/50-60Hz
Outer Packing Size (mm)	(L×W×H) 530×440×195
Unit Size (mm)	(L×W×H) 484×365×88
Gross weight	8kg
Net weight	6.2kg

Specifications are subject to be changed without notice.

CAUTION

- When the “Power switcher” is off, please pull out the power cord from the socket. Please keep the equipment out of water.
- To reduce the risk of electric shock, do not remove the cover.
- No user parts inside. Refer servicing to qualified service personnel.

LY International Electronics Co., Ltd.